

Features

- Hi-tech LCD display panel
- 6063 alum barrel
- Micro-adjust .5-3 psi air-bleeder
- Non-scratch rubber sealed system
- Max. pressure 300 psi
- Foldable hose
- Swivel Head

Digital Gauge Instruction Manual

✓ Button Functions

1. Button "A" → Power/Change units (PSI → BAR → KG/CM²)


✓ Operation Mode

Start-Up


1. Manual start-up → Press Button "A".
2. Automatic start-up → When pressure is above 5 psi the digital gauge will turn on automatically.

Error Message

1. When the pressure is above 300 psi, "ERR" will show in the panel (Picture "a") to remind you.

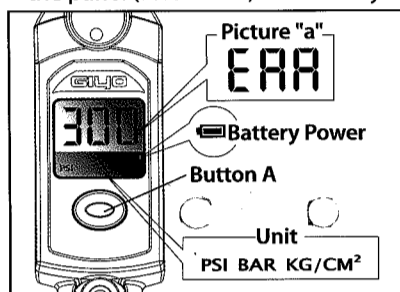

✓ Battery Replacement

Please replace the new 3V battery (CR2032) when the battery power becomes  and flashes. Replace batteries as shown in picture (fig 1).

✓ Shutdown


★ Automatic Shutdown System. The digital gauge will shutdown automatically after 80 seconds when no pressure is detected.

✓ Product Specifications

Digital Gauge & 3V Battery (CR2032)

1. Operation Temperature: -10° C ~ 60° C (degree Celsius)
-14° F ~ 140° F (degree Fahrenheit)
2. Storage Temperature: -10° C ~ 60° C (degree Celsius)
-14° F ~ 140° F (degree Fahrenheit)

※ The average battery life depends on the different status of usage and storage.

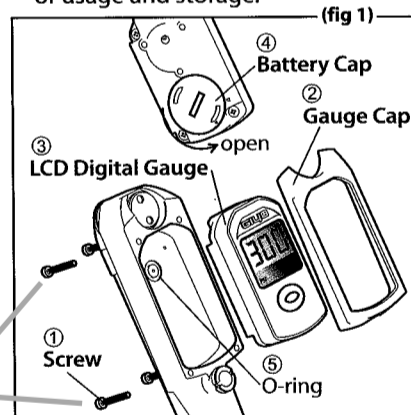

Battery Replacement

- ① Unscrew the 4 screws that are on the back of the gauge base
- ② Lift out the gauge cap
- ③ Take out LCD digital gauge
- ④ Open battery cap and replace the new 3V battery (CR2032).
Please note that the positive pole (+) should face towards the battery cap and be inserted correctly.

★ When the LCD digital gauge is defective, you may purchase a new LCD digital gauge from where you bought the pump. And follow the steps ①②③ above to change the LCD digital gauge by yourself

- ⑤ Please make sure the O-ring in the bottom of the gauge base is still there when replacing the battery and the LCD digital gauge.

WARNING

- ★ Please use and keep away the product from places may contact with water.
- ★ Stay away from sharp objects.

1.5mm ALLEN
USE TO
REPLACE
BATTERY



26-350

Made in Taiwan